
## 5077/5577 Heathrow<sup>™</sup> 0 72" x 42" x 23" Swirl-way<sup>®</sup> Whirlpool and Bathtub





SPECIFICATIONS			
Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Warranty	Limited Ten Year
Construction	Self-contained, pre-plumbed whirlpool bath system mounted on a pre-leveled base	Water Capacity	60 gal. (min) 72 gal. (max)
Number of Jets	16	Shipping Weight	Whirlpool - 175 lbs
Floor Loading Weight	47 lbs. / sq.ft.		Bathtub - 155 lbs
ESSENTIALS PACKAGE		COMFORT PACKAGE	
Pump Motor	Single speed induction pump, 9 AMP	Pump Motor	Variable speed induction pump, 9 AMP
On/Off Control	One button on/off electronic keypad	On/Off Control	Multi-function electronic keypad
Electrical Requirements	One 120V, 20 amp GFCI dedicated circuit. Optional heater: separate 120 V, 20 amp dedicated circuit.	Electrical Requirements	Two separate 120 V, 20 amp dedicated circuits



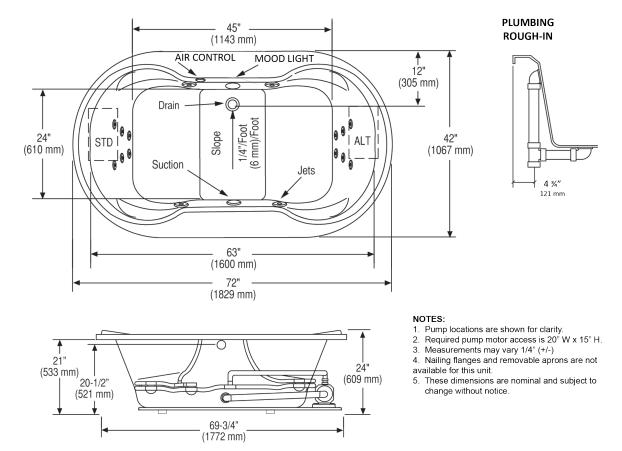

Printed in U.S.A. 04/17 © Mansfield Plumbing Products, LLC Mansfield Plumbing Products • Customer Service Toll Free: 877-850-3060 • Fax 419-938-6234 Website: www.mansfieldplumbing.com • E-mail: custsrvs@mansfieldplumbing.com