Align Technical Specification

Grab Bar

YG0412/YG0418/YG0424/YG0436/YG0442

Stock Numbers:

- YG0412CH 12" Grab Bar Chrome Finish
- YG0418CH 18" Grab Bar Chrome Finish
- YG0424CH 24" Grab Bar Chrome Finish
- YG0436CH - 36" Grab Bar Chrome Finish
- YG0442CH 42" Grab Bar Chrome Finish
- П YG0412BN - 12" Grab Bar **Brushed Nickel Finish**
- YG0418BN 18" Grab Bar **Brushed Nickel Finish**
- YG0424BN – 24" Grab Bar **Brushed Nickel Finish**
- YG0436BN 36" Grab Bar **Brushed Nickel Finish**
- YG0442BN 42" Grab Bar **Brushed Nickel Finish**


Materials:

Grab Bar posts and bars are constructed of stainless steel.

Compliance:

- ADA, ANSI, ASTM, CSA
- Tested to 500lbs. pull



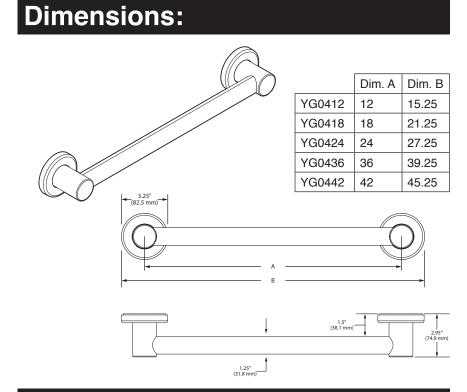

Installation Instructions:

- Please note that screws MUST be mounted into a wood stud for secure installation. 1
- 2. Decide whether you would like to position your grab bar horizontally, vertically or at an angle, remembering that BOTH ends of the grab bar MUST be positioned over a wood stud (unless using secure mount anchors).
- 3 For easier installation and mounting remove 3 set screws from each flange and remove bar from SecureMount[™] Flange.
- Remove cover and re-assemble flange to bar by tightening 3 set screws. 4
- 5. Place grab bar and mark three mounting locations on each of the two grab bar flanges with a pencil
- 6. Drill 1/8" diameter pilot holes at each screw location. Make sure to drill into the stud.
- Install 3 screws and washers each SecureMount™ flange and tighten until secure. If desired, apply 7 silicone caulk to the back of the SecureMount™ plate to guard against water penetration.
- 8 After screws are installed each side, dis-assemble bar from SecureMount[™] flange by removing set screws
- Re-install covers. 9
- Place bar over SecureMount[™] flanges and tighten all set screws. 10
- 11 Snap on covers.

Cleaning Instructions:

To preserve the fine finish of this product, clean only with a soft damp cloth. Dry well. Do not use commercial or abrasive cleaners.

Stock Number:

By Moen Incorporated

Grab Bar

25300 AL MOEN DRIVE • NORTH OLMSTED, OH 44070 CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636 INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726 CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720 WWW.MOEN.COM

© 2015 Moen Incorporated. Moen is a registered trademark and Align is a trademark of Moen Incorporated. All rights reserved.