

AQUA-PANEL CORNER SHOWER UNIT


Z7500-CR

TAG

10 3/8" (264mm) 6 5/16" (160mm) (TYP)

(25mm)

ENGINEERING SPECIFICATION: ZURN Z7500-CR - Prefabricated stainless steel corner shower unit, consisting of the TEMP-GARD pressure balancing shower valve with single bronze stem, stainless steel balancing piston & bottom access integral service stops. Standard with 1/2" copper tubing assembly enclosed by 18 gage stainless steel #4 brushed finish shroud, chrome plated brass shower head with flow control on institutional bracket, metal stem handle, side mount soap dish & all vandal proof securing screws.

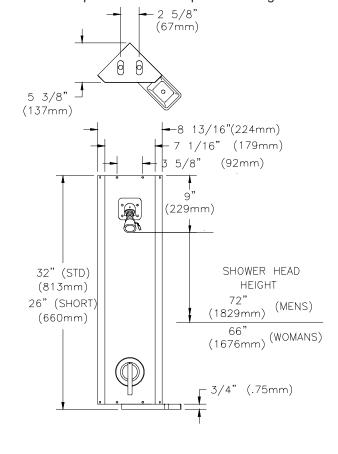

Note: All dimensions are for reference only. Do not use for pre-plumbing

1/4"

(133mm)

23" (STD)

(584mm)

17" (SHORT)

(432mm)

4 1/2"

(114mm)

- 4 1/4" (108mm)

OPTIONS (Check/specify appropriate options)

STANDARDS

Date: 6/7/11

Suffix i2 LS SL TC	Description Fixed Spray Institutional Shower Head Less Soap Dish Short Length Shroud 26" (660mm) Matching Shroud Extension to Cover Thru Ceiling Piping (Specify extension height)	Tested to meet the following standard for valves and plumbing fittings: Shower Heads meet ANSI A112.18.1 Valve meets ASSE 1016 - 2005.
TH 14 16	Matching Shroud Cover for Concealed Horizontal Piping (Application drawings available for custom installations) 14 Gage Stainless Steel Shroud 16 Gage Stainless Steel Shroud	(HHSE)

ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733 Phone: 1-800-997-3876 ♦ Fax: 1-919-775-3541 ♦ www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292