

AQUA-PANEL SHOWER UNIT


Z7500-DV-HW

TAG _____



ENGINEERING SPECIFICATIONS: ZURN Z7500-DV-HW

Prefabricated stainless steel shower unit, consisting of the TEMP-GARD pressure balancing shower valve with single bronze stem, stainless steel balancing piston, & bottom access integral service stops. Unit includes: two way diverter valve w/handwall shower unit complete with 24"[610mm] mounting bar unit, 60"[1524mm] metal hose and standard handset, standard with 1/2" copper tubing assembly enclosed by 18 gage stainless steel #4 brushed finish shroud, chrome plated brass shower head with flow control on institutional bracket, metal stem handles, side mount soap dish, & all vandal proof securing screws.

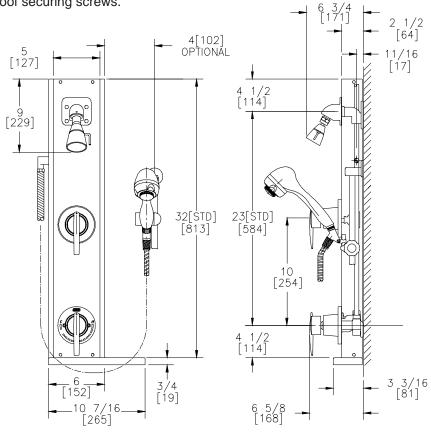

Note: All dimensions are for reference only. Do not use for pre-plumbing **OPTIONS** (Check/specify appropriate options)

__- HW Handwall Units (See Z7000-HW)

_- i2 Fixed spray Institutional Shower Head (Other Institutional Shower Heads Available)

_- LS Less Soap Dish

__- TC Matching Shroud Extension to Cover thru Ceiling Piping (Specify extension height)

__- TH Matching Shroud Cover for Concealed Horizontal Piping (Application drawings available for custom installations)

_- 16 16 Gage Stainless Steel Shroud

ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733 Phone: 1-800-997-3876 ♦ Fax: 1-919-775-3541 ♦ www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292

STANDARDS

Tested to meet the following standards for valves and plumbing fittings:

Shower heads meet ASME A112.18.1/CSA B125.1

