

AQUA-PANEL SHOWER UNIT

Z7500-TH

TAG	




ENGINEERING SPECIFICATION: ZURN Z7500-TH Prefabricated stainless steel shower unit, consisting of the TEMP-GARD pressure balancing shower valve with single bronze stem, stainless steel balancing piston & bottom access integral service stops. Standard with 1/2" copper tubing assembly enclosed by 18 gage stainless steel #4 brushed finish shroud, 18 gage #4 finish horizontal piping cover with adjustable shroud cap, chrome plated brass shower head with flow control on institutional bracket, metal stem handle, side mount soap dish & all vandal proof securing screws.

3" (76mm)

32"(STD)
(813mm)
26"(SHORT)
(660mm)

5" (127mm)
6" (152mm)

10 7/16"
(265mm)

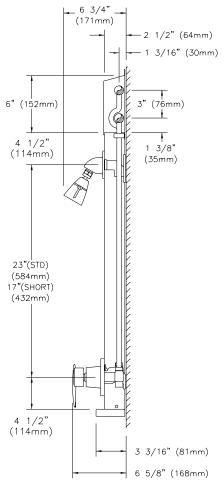

Note: All dimensions are for reference only. Do not use for pre-plumbing

OPTIONAL ACCESSORIES

Suffix Description

__ LS Less Soap Dish

__ i2 Fixed Spray Institutional Shower Head (Other Institutional Shower Heads Available)

14 14 Gage Stainless Steel Shroud

16 16 Gage Stainless Steel Shroud

STANDARDS

Date: 6/7/11

Designed to meet the following standard for valves and plumbing fittings: ASME A112.18.1/CSA B125.1 Valve meets ASSE 1016 - 2005.



ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733 Phone: 1-800-997-3876 ♦ Fax: 1-919-775-3541 ♦ www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292